


# Outdoor

ZONES [1](#) [2](#) [3](#) [4](#)

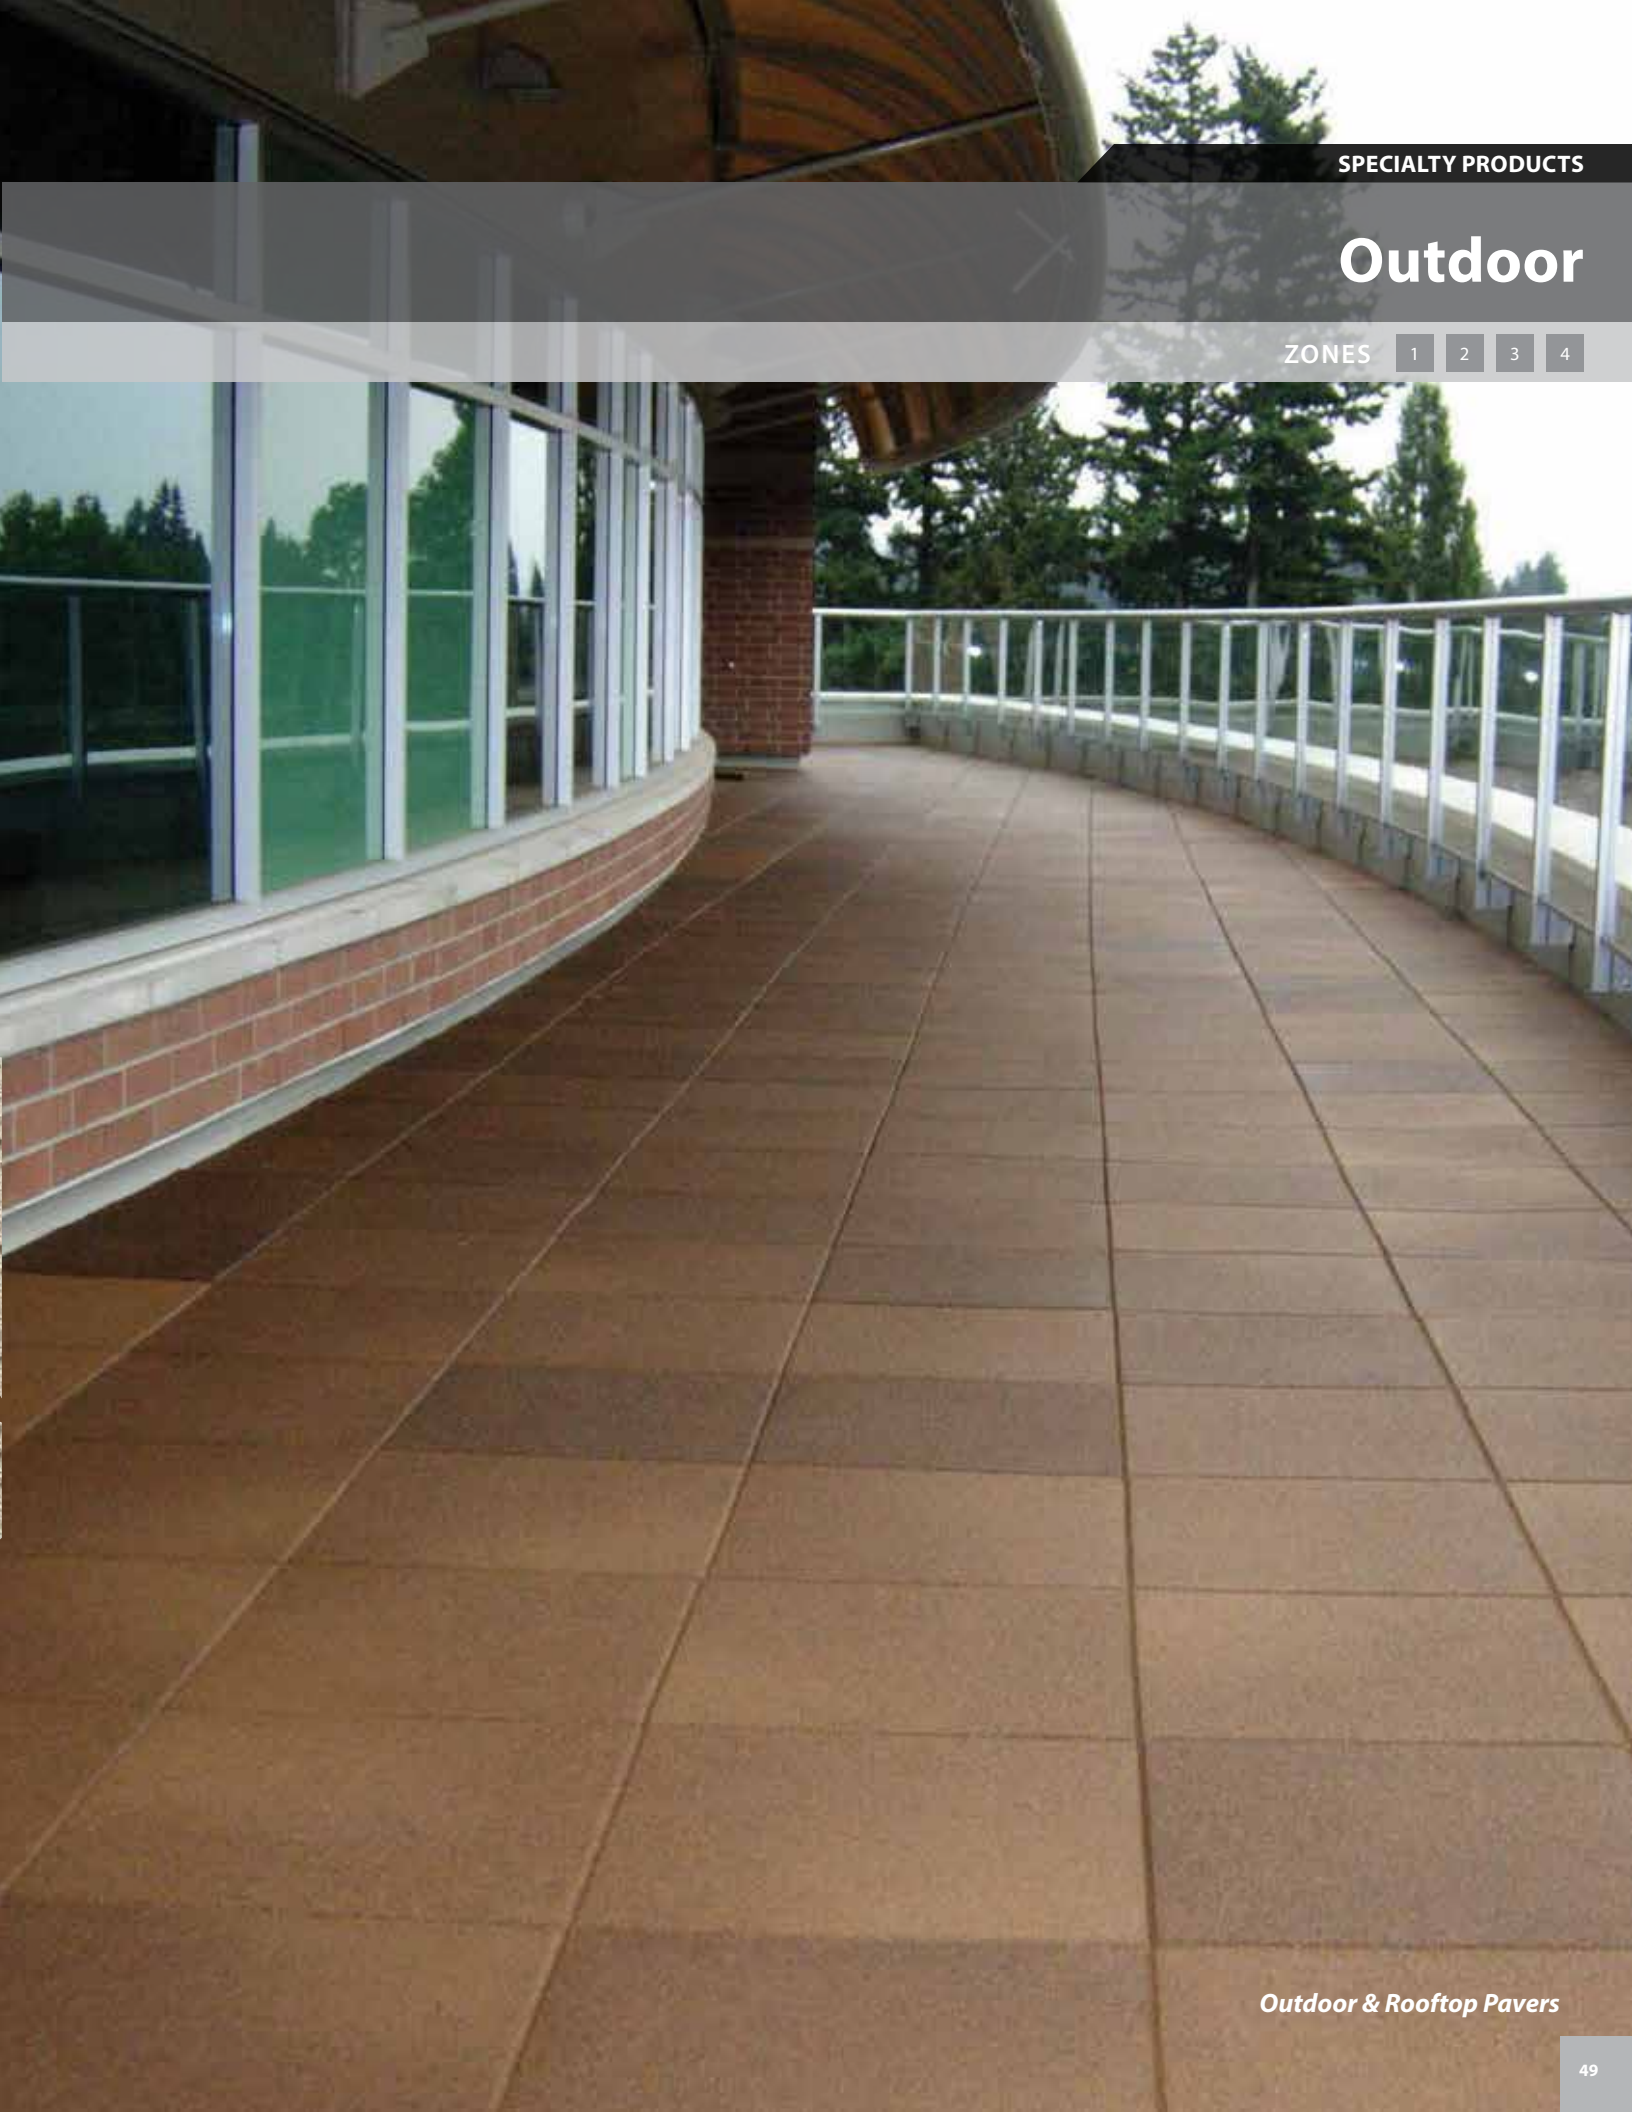

# Outdoor & Rooftop Pavers

**Features**

Zones **1** 2 3 4

Tiles provide superior noise reduction and impact absorption  
 Slip, frost and stain-resistant  
 Water permeable and light weight texture  
 Minimal maintenance required  
 Sustainable product manufactured from recycled materials  
 No adhesive needed  
 Common Uses—rooftops, patios, green roofs, walkways, gardens

*miVantage™  
 Lighter weight  
 and won't  
 crack or break  
 like cement  
 pavers*

**Specifications**

**Material**  
 Recycled rubber

**¾" Pavers Interlocking & Non-Interlocking Tiles**

**Surface Design**  
 Smooth or Brick

**Tile Size**  
 Interlocking = 24" x 24" (61 cm x 61 cm)  
 Non-Interlocking = 23-3/4" x 23-3/4" (60 cm x 60 cm)

**Thickness**  
 3/4" (19 mm)

**Weight**  
 Interlocking = 4.375 lbs/sq ft  
 Non-Interlocking = 3.875 lbs/sq ft

**Note**  
 Can be used for rooftop applications.  
 Drainage system may be required.

**Recycled Content**  
 100% Black = 90% post-consumer  
 Beige, Brown, Green, Red = 87% post-consumer  
 75% color = 49% post-consumer and 7% pre-consumer  
 50% color = 56% post-consumer and 6% pre-consumer  
 25% color = 65% post-consumer and 4% pre-consumer

**1¾" and 2½" Interlocking Tiles**

**Surface Design**  
 Smooth

**Size**  
 24" x 24" (61 cm x 61 cm)

**Thickness**  
 1-3/4" (44 mm), 2-1/2" (63 mm)

**Weight**  
 1-3/4" = 6 lbs/sq ft  
 2-1/2" = 7.25 lbs/sq ft

**Recycled Content**  
 100% Black = 14% post-consumer and 72% pre-consumer  
 Beige, Brown, Green, Red = 14% post-consumer and 71% pre-consumer  
 75% color = 8% post-consumer and 70% pre-consumer  
 50% color = 9% post-consumer and 72% pre-consumer  
 25% color = 11% post-consumer and 73% pre-consumer


**Possible LEED v 2009 Credits**

MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)  
 IEQ Credit 4.1 (1 point)




**Backing for 1¾" and 2½" Pavers**  
 Water flow designed backing—Ideal for landscape applications

**Interlocking Tile System**

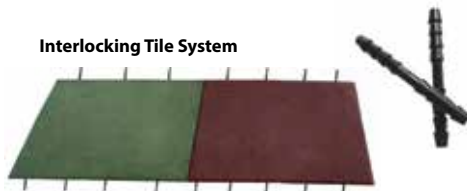

**Pigment**

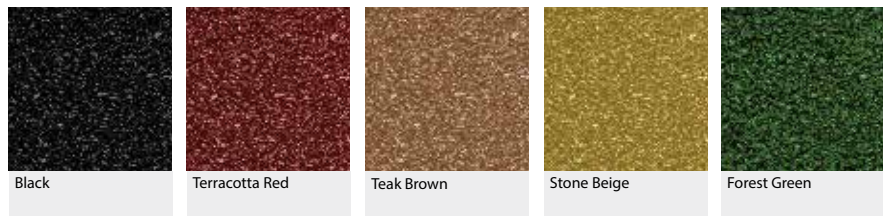

**25% Intensity**  
 Also available in 50% and 75% color intensities



**Smooth and Brick Top Designs**


Brick design available in 3/4" thickness only





# SaniPath™

Features	Zones
	1 2 3 4
<p>Comfortable for bare feet                      Provides slip resistance                      Antimicrobial and antifungal additives are infused during production                      UV-Resistant                      Instant 4-way water drainage                      Easy handling for cleaning and storage                      Easy to clean with mild household detergent                      Minimum 30% post-consumer recycled PVC content                      Common Uses—rooftops, decks, locker rooms, showers/stalls, poolside, jacuzzis, docks, anywhere there is wet flooring</p>	
Specifications	
<p><b>Material</b>                      Open grid PVC matting with slip-resistant surface, antibacterial/antifungal additives, and instant 4-way water drainage</p> <p><b>Roll Sizes</b>                      2' x 33', 3' x 33'</p> <p><b>Thickness</b>                      3/8"</p> <p><b>Weight</b>                      0.75 lbs/sq ft</p> <p><b>Recycled Content</b>                      30% post-consumer</p>	
Possible LEED v 2009 Credits	
<p>MR Credit 4 (1-2 points)</p>	

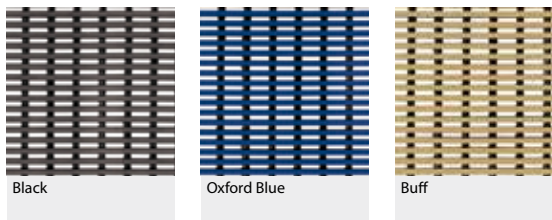

# Skypath

Features	Zones
	1 2 3 4
<p>Withstands extreme wind (up to 94 mph) and weather conditions                      Diamond cut design provides slip resistance and sure footing                      Compatible with vinyl roofing membranes                      Open grid design encourages fast water drainage                      Easy to cut to size and install                      Easy to roll up and store                      UV-resistant Gray color helps distinguish frosty or dewy surfaces                      Common Uses—rooftop walkways, access to HVAC and telecommunications equipment on rooftops</p>	
Specifications	
<p><b>Material</b>                      Open grid, self draining, non-porous, PVC roof walkway matting system</p> <p><b>Roll Sizes</b>                      2' x 33'; 3' x 33'</p> <p><b>Thickness</b>                      5/8"</p> <p><b>Weight</b>                      1.33 lbs/sq ft</p>	

**miVantage™**  
*Specifically designed to protect flat roof membranes from pedestrian foot traffic*

