


ACCESSORIES



ALUMINUM FRAMING

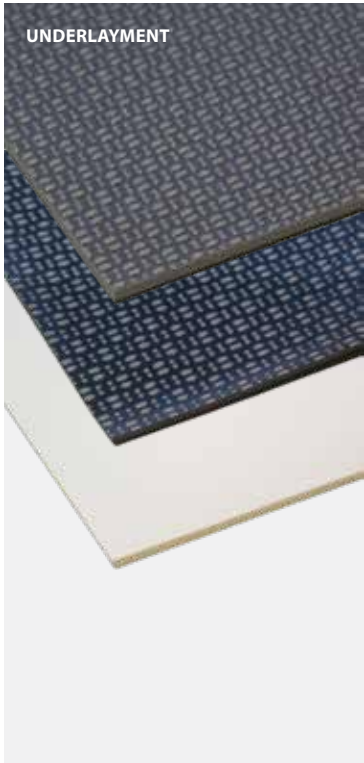

NOSING, TRANSITIONS & LEVELERS



CLEANERS & SEALERS





UNDERLAYMENT

SOUND

FloorFx is a unique acoustical underlayment for Floorworks® 3mm LVT. Different than other sound absorption layers, FloorFx offers a rigid construction which virtually eliminates denting that is common with other sound barriers. FloorFx has been engineered to provide simple installation reducing install time by 50% compared to other systems. FloorFx is a floating underlayment system that does not require an adhesive to be installed. The overlapping joints with pre-applied pressure sensitive adhesive activates on contact and pressure.

SOUND & COMFORT

Underfloor QC is sound-inhibiting cushion underlayment for resilient flooring. Use Underfloor QC to improve underfoot comfort and acoustics between floors. Underfloor QC is suitable over concrete, wood and radiant heat systems and is installed using Perma-Bond adhesive depending on the application.


MOISTURE & SOUND

Underfloor MC is suitable over concrete, wood and radiant heat systems and can be installed as a floating underlayment system or with perimeter adhesive depending on the application.

MOISTURE

Underfloor SL is a cost-effective moisture barrier that offers quick installation. The dimensionally stable vinyl underlayment equalizes minor subfloor unevenness.

	MOISTURE	MOISTURE & SOUND	SOUND & COMFORT	SOUND
Underlayment	Underfloor SL	Underfloor MC	Underfloor QC	FloorFx
Material	Specially coated fiberglass reinforced PVC	Specially coated fiberglass reinforced PVC	PVC foam cushion	Two MDF panels XPS foam sound reduction layer & polyethylene film
Thickness	1.4 mm	4.0 mm	4.0 mm	8.0 mm
Weight	0.33 lbs/sq ft	0.37 lbs/sq ft	0.45 lbs/sq ft	11.5 lbs/panel
Dimensions	Rolls 4' 9" x 82'	Rolls 4' 9" x 82'	Rolls 6' 7" x 68' 8"	Panels 32.5" x 22.25"
ASTM 2170 Substrate Moisture Relative Humidity	92%	92%	82%	75%
ASTM F970 Static Load: (pass = <.005" @ 175 psi)	Pass	Pass	Pass	Pass
ASTM F1914 Residual Indentation	7.43% (-0.013")	24.70% (-0.061")	26.62% (-0.074")	2.96 (-0.013")
ASTM E989 IIC *	36	50	47	52
ASTM E2179 IIC (Delta) *	ΔIIC 8	ΔIIC 22	ΔIIC 19	ΔIIC 24

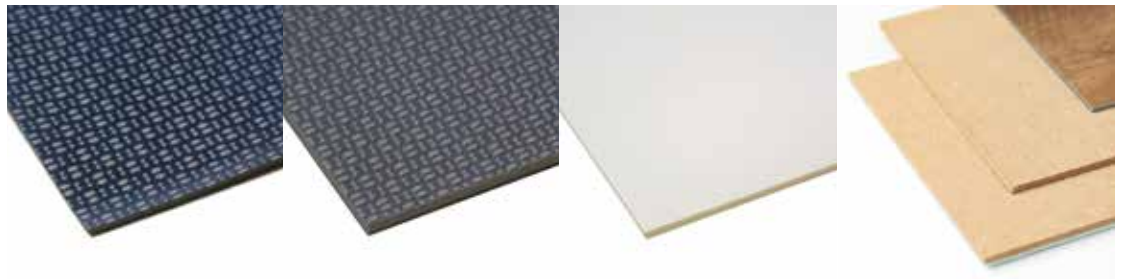

ALUMINUM FRAMING


Mats Inc. offers a comprehensive line of aluminum frames and transitions for all of our products to ensure smooth transitions and trouble-free installations. Frames are sold in full lengths as listed below or in 1' increments and should be cut to the appropriate size and mitered on-site to ensure proper fit.

PRODUCT	TYPE	SIZE	ITEM#
"J" Frame	Recessed/Surface Mount	5/8" x lengths to 20'	ALJFRLP
"L" Frame	Recessed	7/16" x lengths to 12'	ALLFR
"R" Frame	Recessed/Surface Mount	7/16" x lengths to 12'	ALRFRLP
"T" Section Divider	Recessed/Surface Mount	5/16" x lengths to 10'	ALT38
Ramp Frame	Surface Mount	3/8" x lengths to 12'	ALRMP3
Overlap Ramp Frame	Surface Mount	7/16" x 2-3/4" x lengths to 10'	ALSMR2
"Z" Frame	Recessed/Surface Mount	3/8" x lengths to 12'	WALZFR12


Note

Many Aluminum Foot Grilles are supplied with frame systems fabricated specifically for the product type and installation method. These frames are shipped with the Foot Grilles. Additional frames are not required. Consult our Product Specialists for details.


"J" Frame




"L" Frame




"R" Frame




"T" Section Divider




"Z" Frame



Ramp Frame








Overlap Ramp Frame




NOSING & EDGING

Many matting Roll Goods and Walk-Off Mats & Runners may be cut to custom sizes and have vinyl nosing applied to one, two, or all four sides of the mat to provide smooth transitions for loose-laid applications. Consult one of our Product Specialists for assistance.


	Product	Size	Application
	Factory Edge		
	Standard (NOSWON-XX) (Flat Profile) Black (BK) Brown (BR)	3/16" x 2-7/16" x 50' (exposed width is 1-1/4") LOOSE up to 50 feet	Glue on/Sew on
	Low Profile (LOPROFI) Black	1/4" x 2-11/16" x 80' (exposed width is 1-1/2") LOOSE up to 80 feet	Sew on
	UltraFlex (NOFLEX-XX) Black (BK) Brown (BR)	5/16" x 3-5/16" x 50' (exposed width is 1-7/8") LOOSE up to 50 feet	Sew on
	Narrow Cove		

	Product	Size	Application
	Wide Cove		
	High Profile		
	Heat Press Embossed		
	Emboss		


Standard Nosing

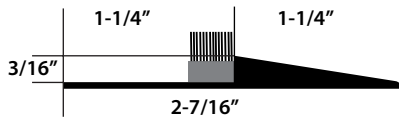


Low Profile Nosing



Premium "Ultra-Flex" Nosing



High Profile Nosing




Berber Fiber Example Pile Thickness 5/32" Roll Thickness 3/8"

TRANSITIONS & LEVELERS

Consult the specifications of each product for the appropriate transition and leveler options for your mat, or contact one of our Product Specialists for assistance.

TRANSITIONS				
PRODUCT	DESCRIPTION	SIZE	COLOR	ITEM#
Ramp-Flex PVC Ramp	For use with modular tiles with heights from 5/16" to 7/16"	12' lengths (full lengths only)	Black	ALCRS BK
Trans-Ramp	For use with modular tiles with heights from 5/16" to 7/16"	12' lengths (full lengths only)	Black	WAL PVC RMP 2
LEVELERS				
PRODUCT	DESCRIPTION	SIZE	COLOR	ITEM#
Level-Flex Leveling Strip (1/8")	Use to shim material of uneven heights	1/8" x 100'	Black	NOLEV18 BK
Level-Flex Leveling Strip (1/4")	Use to shim material of uneven heights	1/4" x 50'	Black	NOLEV14 BK

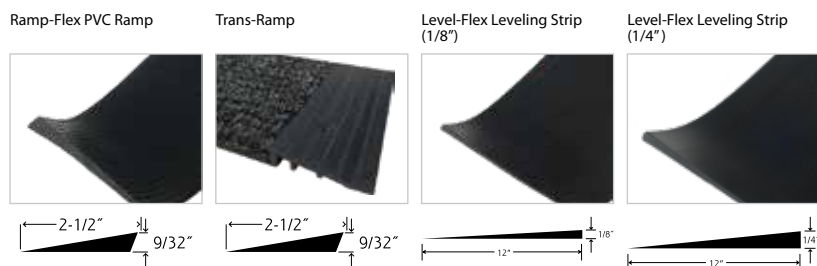

TAPES

PRODUCT	TYPE	SIZE	ITEM#
Contact Tape	Permanent installations of transition strips or matting over hard surfaces. Will not leave residue.	1" x 164' Roll (Narrowest)	MSTAC1
		2" x 164' Roll (Narrow)	MSTAC2
		3.4" x 165' Roll (Wide)	MSCONT3
Success Tape	Adhering rubber- and vinyl-backed matting to carpet or hard surfaces. Will not leave residue.	39" x 82' Roll (Extra Wide)	MSDUO39
Velcro® Brand Tape	Adhering rubber- and vinyl-backed matting to carpet	1" x 75' (Loose to 75')	MSVELCR
3M™ Stay-in-Place Matting Tape 130	Designed to keep mats in place on finished hard surface floors Features a double-sided tape with a strong adhesive on one side that sticks to the mat backing, plus a low-tack, adhesive on the opposite side to keep the mat in place Repositionable for moving or cleaning	2" x 100' Roll	TAPE130 TAPE
3M™ Stay-in-Place Matting Tape 140	Designed to keep mats in place on looped-pile carpeted surfaces Features Scotchmate™ Hook Fasteners that intertwine with looped carpet fibers to keep the mat in place Repositionable for moving or cleaning	2" x 100' Roll	TAPE140 TAPE
3M™ Matting Seaming Tape	Brown vinyl tape to bridge and bond mat sides and ends together. Use with 3M™ Matting Adhesive	2" x 100' Roll	MS3MTAPBR

Velcro® is a registered trademark of Velcro BVBA. Used with permission.



MATS INC. CARPET MATTING AND 3M™ NOMAD™ MATTING NOSING OPTIONS

Please contact us at 1-800-628-7462 to request a brochure.

ADHESIVES

Mats Inc. offers a complete line of high-quality adhesives designed to make installation of our products trouble-free. Select the appropriate adhesive for our Roll Goods, Modular Tiles and Sports Flooring products from the chart below. Adhesive recommendations may also be found in the Specifications section for each product in this catalog. Please note actual coverage may vary depending on substrate. For assistance, or more detailed installation instructions, please contact our Product Specialists.

PRODUCT	USAGE	SIZE	COVERAGE (APPROXIMATE)	ITEM#
All-Weather Solvent-Free Adhesive	Exterior use. Rubber-backed and latex-backed matting products	1 gallon	75-100 sq ft	MSH0241
		4 gallon	360-400 sq ft	MSH0244
Cold Weld Adhesive	Seaming vinyl contract flooring for glue down installations	4.5 oz	200 lin ft	MSCOLDWELD45
Duo-Bond	Combination, Domination™, Duo Tile, Panorama Living Color	4 gallon	Coverage varies	DBOND 4
MI Multi-Bond Carpet Mat Adhesive	All rubber- and latex-backed matting	1 gallon	110-125 sq ft	MSMULT1
		4 gallon	440-500 sq ft	MSMULT4
MI Perma-Bond Adhesive Do not use for other roll and tile goods except the ones listed	Debolon	1 gallon	Coverage varies	MSPERMA 1
	Floorworks® Planks and Tiles		160-260 sq ft	
	Woodflex™/Gameflex®		160-180 sq ft	
	Rubber-backed tiles		108-126 sq ft	
	Floorazzo™		160-200 sq ft	
		4 gallon	Coverage varies	MSPERMA 4
MI Release-Bond Modular Tile Adhesive	All modular mat tiles with Bitumen backing	1 gallon	220-260 sq ft	MSTILE1
	Chicago Collection™		160-180 sq ft	
		4 gallon	Coverage varies	MSTILE4
Urethane Bond Rubber Flooring Adhesive	Permanent installations of solid rubber and rubber-backed sports flooring, rubber-backed contract floor covering and Tire Tile	2 gallon	120-160 sq ft	MSCX941 2
		5 gallon	300-400 sq ft	MSCX941 5
Vinyl Cement	Edging and seaming, vinyl nosing	1 pint	Coverage varies	MSCEM PT
		1 quart	Coverage varies	MSCEM QT
MI Perma-Spray 2000	Spray adhesive for Floorworks® Planks and Tiles, Bitumen backed modular tiles	22 oz can 6 cans per case Full cases only	160-190 sq ft	MSSPRAY 2000
Ultrabond G21	SureTac™ Premium Vinyl backed goods	2 gallon	370-490 sq ft	MSG21 2PT
	Spectation™		300 sq ft	
	Ovation		200-250 sq ft	
Tacky-Back	Solvent-free, acrylic dispersion adhesive backing pre-applied to flooring for quick and easy installation on sub-floors with moisture concerns	7/8" width x 10' length Thickness: 0.13 mm		MGBOND TAPE
3M™ Matting Adhesive	Urethane-based adhesive for use with Matting Seaming Tape and/or edging materials	3 oz	10 lin ft	MSTUBE

CLEANERS & SEALERS

PRODUCT	USAGE	SIZE	COVERAGE (APPROXIMATE)	ITEM#
JohnsonDiversey STRIDE Neutral Cleaner Citrus Scent (Green Seal™ Certified)	Recommended for regular cleaning of Duo Tile, Panorama Rubber, Woodflex™ and Gameflex®	1 gallon	Coverage varies	MSSTRID 1
		5 gallons	Coverage varies	MSSTRID 5
Duo-Clean	Combination, Domination™, Duo Tile, Panorama Living Color	10 liters (2.64 gallons)	Coverage varies	DCLEAN 10L
Duo-Seal	Combination, Domination™, Duo Tile, Panorama Living Color	10 liters (2.64 gallons)	Coverage varies	DSEAL 10L
Floorazzo™ Primer	Sealer/Primer for Floorazzo™	1 quart	500 sq ft	FZPRIMEQ
		1 gallon	2,000 sq ft	FZPRIMEG
Floorazzo™ Gloss Coating	Finish/Coating for Floorazzo™	1 quart	100 sq ft	FZGLOSSQ
		1 gallon	400 sq ft	FZGLOSSG
Floorazzo™ Satin Coating	Finish/Coating for Floorazzo™	1 quart	100 sq ft	FZSATINQ
		1 gallon	400 sq ft	FZSATING